

66HL4M-(V) 610-635 Watt

Mechanical Characteristics

Acjj Rwnc	L +rwnc Km lm+apwqr_jjg lc
Lm, md acjjq	/10 44ÖÖ'
Bgk c lqgm lq	0160Ö //12Ö13 k k
Ucgefr	06,0 ie
Dpm l r Ej_qq	1,0 k k * ? lrg+pc cargm l Am_rgle* Fge f Rp_l q k gqgqm l * Jm u Gpm l * Rc k ncp cb Ej_qq
Dp_k c	? lmbgxcb ?js kg lgs k ?jjmw
Hs l argm l @mv	GN46 P_rcb
Npmrcargm l Aj_qq	Aj_qq Gg
GCA Dgpc Rwnc	Aj_qq A
Am l l carp m Rwnc	H l .1K-KA2-Mr fcpq
Msrnsr A_`jcq	2,. k k ° &)'%2. . k k * &+'%0. . k k mp Asqrm k gxcb Jc l er f

Packaging Configuration

N_jjcr Bgk c lqgm lq	0174Ö // . Ö/03/ k k
N_aigle bcr_gj &Rum n_jjcrq; M l c qr_ai'	1/ naq-n_jjcrq* 40 naq-qr_ai* 40. naq- 2. %FO Am l r_g l cp

Specifications (STC)




K_vgk s k Nmucp Nk_vYUn[	4/. 4/3 40. 403 41. 413
K_vgk s k Nmucp Tmjr_ec TknYT[	2.,34 2.,51 2.,7. 2/,.5 2/,01 2/,17
K_vgk s k Nmucp Asppc l r GknY?[	/3,.2 /3,/. /3,/4 /3,00 /3,06 /3,12
Mnc l+agpasgr Tmjr_ec TmaYT[	26,41 26,57 26,73 27,1/ 27,05 27,21
Qfmpr+agpasgr Asppc l r GqaY?[	/4,. / /4,.6 /4,/3 /4,00 /4,07 /4,14
Kmbsjc C agc l aw QRA Y#[	00,36 00,55 00,73 01,/2 01,10 01,3/
Nmucp Rmjcp_lac	.) 1 #
Rc k ncp_rspc Amc agc l r q md Nk_v	+. ,07 # - A
Rc k ncp_rspc Amc agc l r q md Tma	+. ,03 # - A
Rc k ncp_rspc Amc agc l r q md Gqa	...23 # - A

QRA&gpp_bq_lac / . . . U - k ° Acjj Rc k ncp_rspc 03°A' ?K; / ,3

Application Conditions

Mncp_rj l e Rc k ncp_rspc	+2. A)5. A
K_vgk s k Qwgrc k Tmjr_ec	/ . . . -/3. . TBA &CA'
K_vgk s k Qcpq c q Dsqc P_rj l e	1. ?

Engineering Drawings

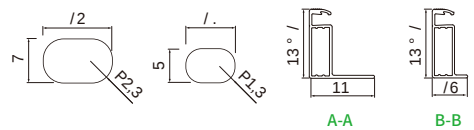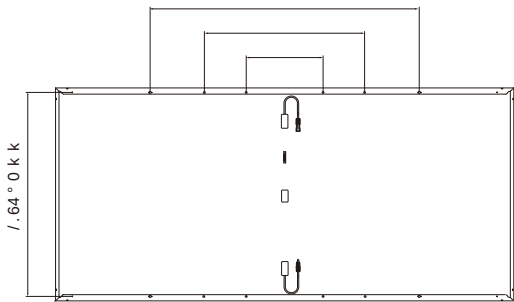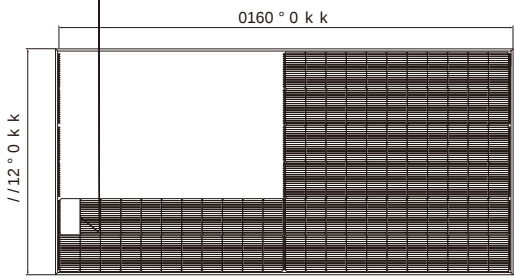

(Lmrcf Dmp qncag a bgk c lqgm lq_l b rmjcp_lac p_l ecq' njc_qc
pcdcp rm rfc amppcqnml bg l e bcr_gjcb k mbsjc bp_u g l eq,

Electrical Performance

